


WILSON HOOK

DEADWEIGHT GROUP
4200 dwt



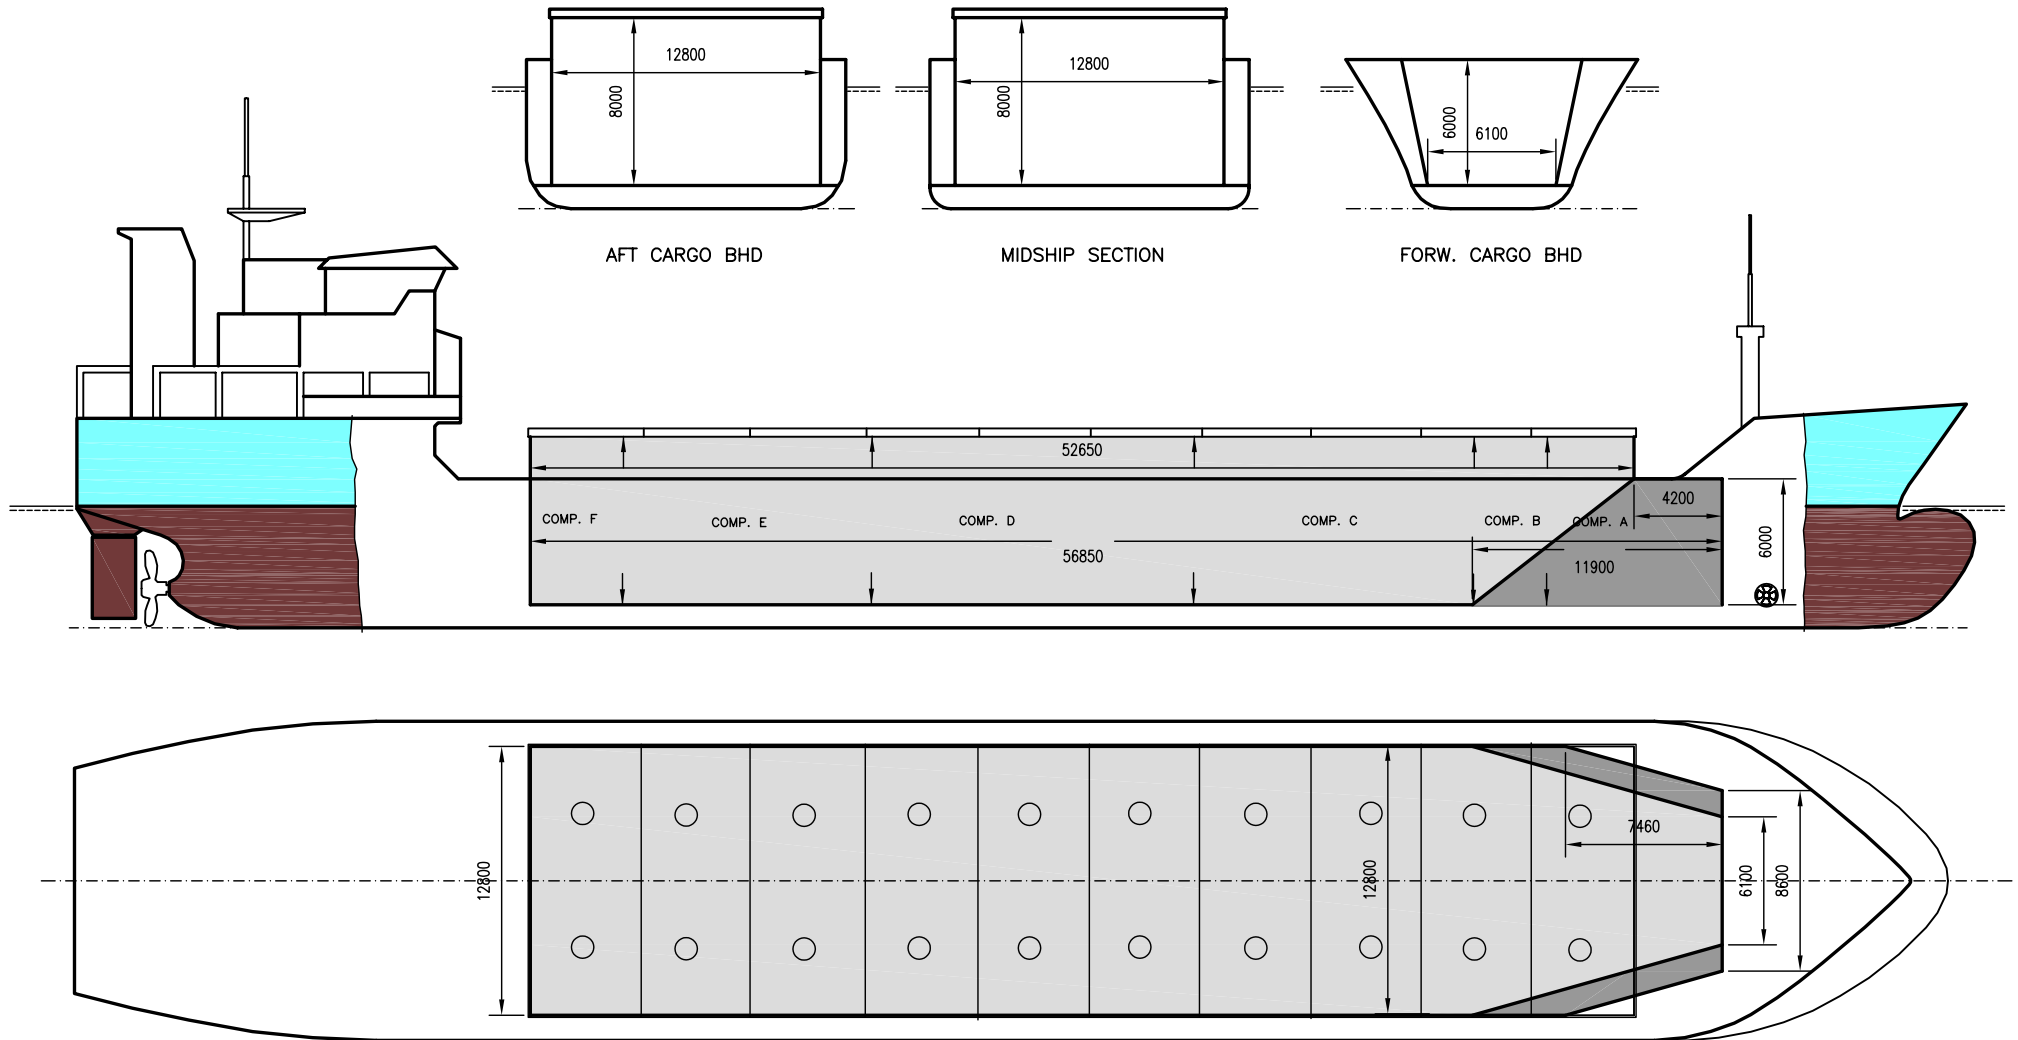

WILSON HOOK

If not otherwise specified :
Dist/Dim in meters
Weights in m.tons

All details given in good faith without guarantee

DWT GROUP 4000
IMO NO 9017434
CALL SIGN P3TW9
BUILD 01/2004
FLAG Cyprus

Builders Sava Shipyard
Classification GL / +100 A5 E1 G +MC E1 AUT
Length oa 89.98
Breadth mld 15.20
Depth mld 7.10
Draft summer 5.65
Deadweight summer draft 4280
Draft winter 5.53
Deadweight winter draft 4145
Gross tonnage 2993
Net tonnage 1575
Immersion(load draft) TPC 11.70
Mean draft of ship in heavy ballast 3.85
Distance from forward end of No.1 Hatch to aft end of last hatch 52.55
Hatch type Pontoon type
Container (TEU) capacity Hold / Deck - / -

Hatch details:

- a : Distance from waterline fully ballasted to top of hatch coamings
b : Distance from waterline fully loaded to top of hatch coamings
c : Distance from tank top to top of hatch coamings
d : Max permissible loading on hatch covers
e : Distance from ship's rail to inside hatch coamings
f : Height of hatch coamings
g : Hatch opening
h : No. of Loadingholes on hatchcovers X diameter in mm

Remarks :

- NB - Extreme breadth 15.46 m due to fender list.
One cargo hold, fitted with a large Strong Beam in the middle.
4.20 m overhang forward.
Cargo Hold is equipped with 8 quarter-high moveable bulkheads, 5 positions.
Bulkheads can be used ias either 4 half height bulkheads or 2 full height bulkheads.
If 2 full bulkheads used, total cubic capacity of hold reduced by approximately 87 cbm.
The bulkhead sections are normally stored on deck. However, if stored in forward end of hold, free length on tanktop reduced to 54.35m.
The hold is boxed up to forward movable bulkhead in position.

Max permissible load on deck, mt/sqm 1.60
Max permissible load on tanktop, mt/sqm 12.00
Max air draft - 1 23.50
Max air draft - 2 -
Distance from keel to top antenna -1 27.35
Distance from keel to top antenna -2 -
Water ballast capacity 1 909.90
Fuel main engine - capa.(cbm) 212.20
Fuel aux engine - capa.(cbm) 33.30
Speed service, knots 11.50
Cargo gear No
Bow thruster220 Kw . Yes
Boxed Yes
Double skin Yes
Open hatch No
Rhine fitted No
Ammonium Nitrate fitted Yes
FeSi fitted Yes

Htch#	Bale							Grain				Hold dimensions	Compartm :		Communication :		Equipment		
	a	b	c	d	e	f	g	h	Hold#	cbm	cbft		cbm	cbft	#	cbm		Type	No
1	5.24	3.46	8.00	1.60	1.20	2.00	52.65 x 12.80	5 x 470 mm	1	5455	192 631	5455	192 631	56.85 x 12.80 x 8.00m	a	867	Telex 1	421060410	Inmarsat
															b	290	Telex 2		
															c	1 418	Tlph 1	+357 97777841	Gsm
															d	1 410	Tlph 2		
															e	954	Fax		
															f	311	Email	wilson.hook@oel.dualog.net	