


WILSON HUSUM

DEADWEIGHT GROUP
4200 dwt



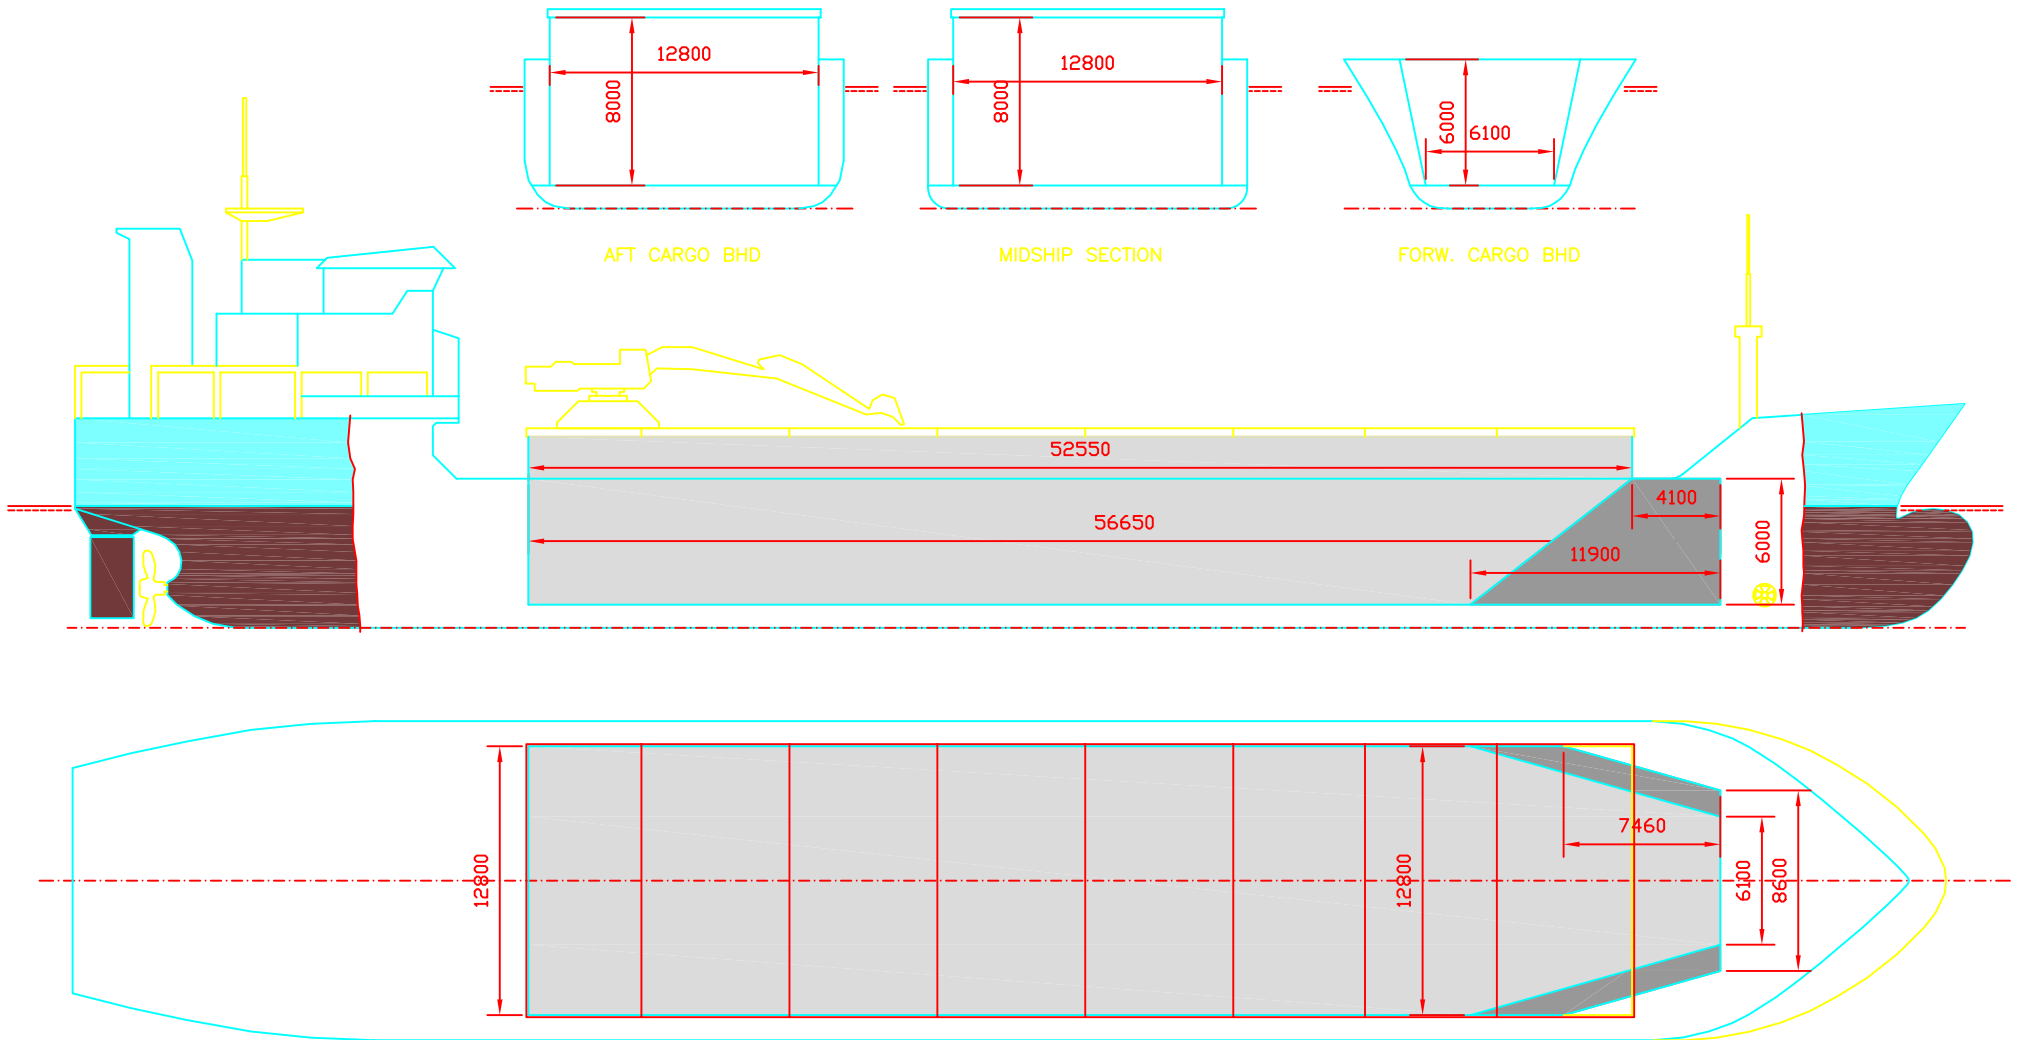

WILSON HUSUM

Ex. Marble Sea
 DWT GROUP 4000
 IMO NO 9017379
 CALL SIGN 8PSQ
 BUILD 1998
 FLAG Barbados

If not otherwise specified :
 Dist/Dim in meters
 Weights in m.tons

All details given in good faith without guarantee

Builders	Brodogradiliste Begej, Zrenjanin, Yugoslavia	Max permissible load on deck, mt/sqm	1.60
Classification	BV / I*HULL*MACH*AUT-UMS aen.cargo ship -heavycargo -unres.na	Max permissible load on tanktop, mt/sqm	12.00
Length oa	89.90	Max air draft - 1	24.00
Breadth mld	15.80	Max air draft - 2	-
Depth mld	7.10	Distance from keel to top antenna -1	27.00
Draft summer	5.64	Distance from keel to top antenna -2	-
Deadweight summer draft	4138	Water ballast capacity	1 997.00
Draft winter	5.52	Fuel main engine - capa.(cbm)	150.00
Deadweight winter draft	4001	Fuel aux engine - capa.(cbm)	23.00
Gross tonnage	3092	Speed service, knots	12.50
Net tonnage	1634	Cargo gear	Volvo Excavator EC 650 Yes
Immersion(load draft) TPC	11.65	Bow thruster	.220Kw. Yes
Mean draft of ship in heavy ballast	3.97	Boxed	No
Distance from forward end of No.1 Hatch to aft end of last hatch	52.60	Double skin	Yes
Hatch type	Mac Gregor Folding type	Open hatch	Yes
Container (TEU) capacity Hold / Deck	- / -	Rhine fitted	No
		Ammonium Nitrate fitted	No
		FeSi fitted	No

Hatch details:

- a : Distance from waterline fully ballasted to top of hatch coamings
 b : Distance from waterline fully loaded to top of hatch coamings
 c : Distance from tank top to top of hatch coamings
 d : Max permissible loading on hatch covers
 e : Distance from ship's rail to inside hatch coamings
 f : Height of hatch coamings
 g : Hatch opening
 h : No. of Loadingholes on hatchcovers X diameter in mm

Remarks :

- One cargo hold fitted with a Strong Beam in the middle.
 4.20 m overhang forward.
 Cargo Hold is equipped with 4 quarter-high moveable bulkheads, 3 positions,
 possible to fully separate the Cargo Hold in: 25% - 75%, or 50% - 50%,
 alternatively to separate with two half high walls in: 25% - 25% - 50%.
 For full and complete load, SG must be minimum 1.6 t/m3 (S/F minimum 56 cbft/mt).

Htch#	Bale							Grain				Hold dimensions	Compartm :		Communication :		Equipment		
	a	b	c	d	e	f	g	h	Hold#	cbm	cbft		cbm	cbft	#	cbm		Type	No
1	5.10	3.44	8.00	1.60	1.50	2.00	52.70 x 12.80	0	1	5417	191 300	5417	191 300	56.52 x 12.80 x 8.00			Telex 1	425 941 610	Inmarsat
																	Telex 2		
																	Tlph 1	+47 909 90 634	Gsm
																	Tlph 2		
																	Fax		
																	Email	w-husum@gtw.dualog.com	