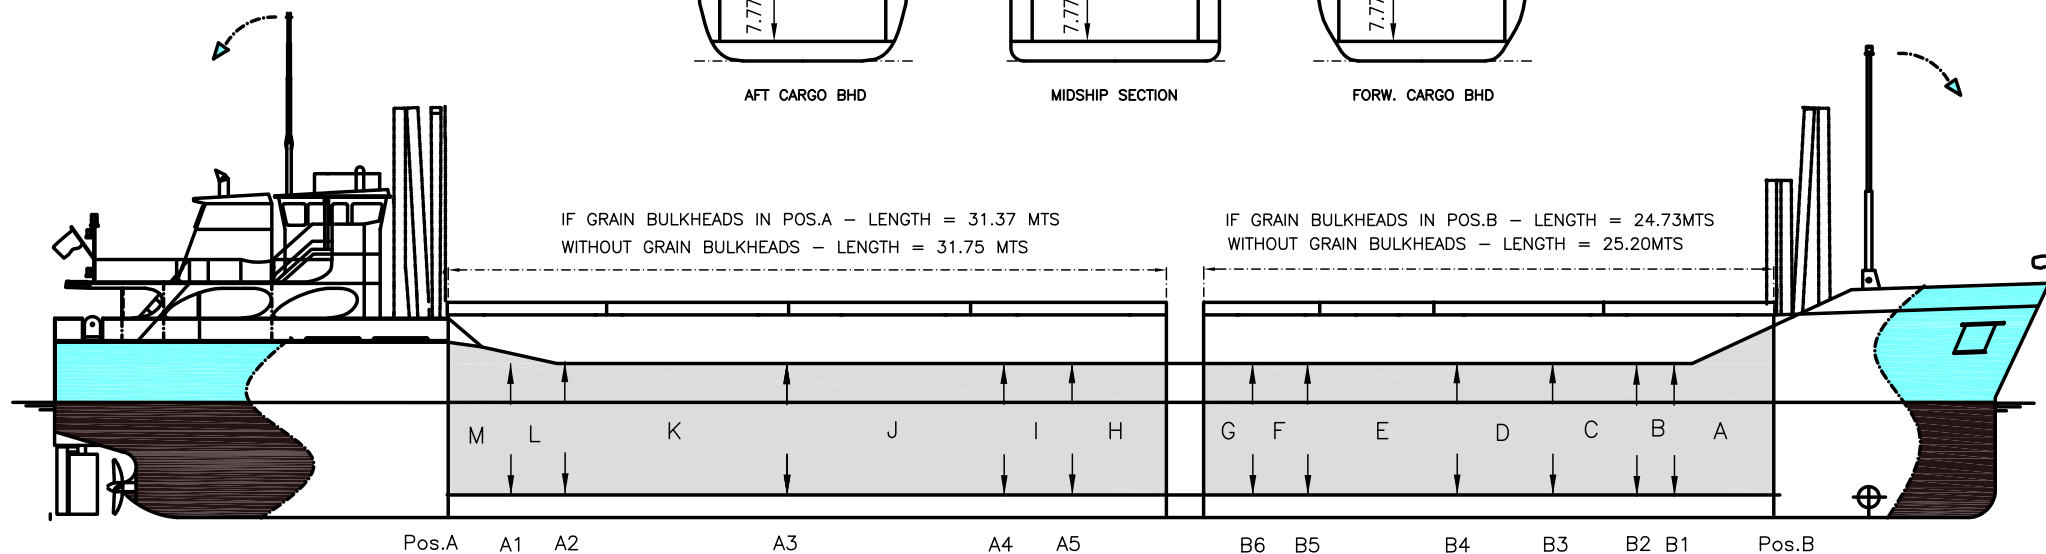
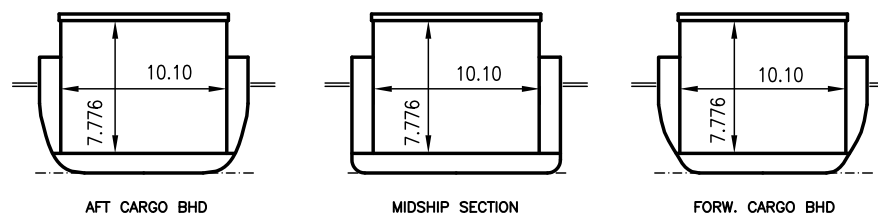


If not otherwise specified:
Dist/Dim in meters
Weights in m.tones

All details given in good faith without any guarantee

Builders	
Classification	DNV GL / 100 A5 E Multi-purpose dry cargo ship Equipped for carriage of containers DBC SOLAS-II-2,Reg.19 G Strengthened for heavy cargo MC E AUT
Length oa	88.3
Breadth mld	12.4
Depth mld	7.76
Draft summer	5.15
Deadweight summer draft	3606
Draft winter	5.04
Deadweight winter draft	3495
Gross tonnage	2451
Net tonnage	1325
Immersion(load draft) TPC	10.55
Mean draft of ship in heavy ballast	3.1
Distance from forward end of No. 1 hatch to aft end of last hatch	58.5
Hatch type	TTS multifold crocodile
Container (TEU) capacity Hold / Deck	0 / 20

Hatch details:

a : Distance from waterline fully ballasted to top of hatch coamings
b : Distance from waterline fully loaded to top of hatch coamings
c : Distance from tank top to top of hatch coamings
d : Max permissible loading on hatch covers
e : Distance from ship's rail to inside hatch coamings
f : Height of hatch coamings
g : Hatch opening
h : No. of Loadingholes on hatchcovers X diameter in mm

Remarks:

2 movable bulkheads/9 different positions/4 different compartements.
Equipped for carriage of containers only on hatch 2 (20 TEU).
Equipped for dangerous goods.
Hatch opening (g) is excl. Bulkheads.
Hold dimensions are incl. Bulkheads in parked positions.
Thikness of bulkheads are 280mm each.

A60

Htch#	a	b	c	d	e	f	g	h
1	5.95	3.75	7.78	1.6	1	2.2	25.2 x 10.1	6 x 600
2	5.95	3.75	7.77	1.6	1	2.2	31.75 x 10.1	8 x 600

	Bale		Grain		
Hold#	cbm	cbft	cbm	cbft	Hold dimensions
1	1969	69535	1962	69287	24.7 x 10.1 x 7.8
2	2487	87833	2479	87545	31.4 x 10.1 x 7.8

Compartments	a	b	c	d	e	f	g	h	i	j	k
	321	120	239	334	500	168	179	317	215	689	784
	168	226	0	0	0	0	0	0	0	0	0

Ex. Hero Omken
IMO No 9313709
Call sign 8PBH3
Build 2008
Flag BRB

Max permissible load on deck/hatch-cover, mt/sqm	1.6
Max permissible load on tanktop, mt/sqm	15
Max air draft - 1	19.25
Max air draft - 2	0
Water ballast capacity	1378
MGO Capacity (Cbm)	84
IFO Capacity (Cbm)	130
Service speed, knots	11
A60	Yes
Bow thruster	130 kW, Yes
Boxed	Yes
Open hatch	Yes
Rhine fitted	No
Ammonium Nitrate fitted	Yes
FeSi fitted	Yes
Keel to top antenna fwd/aft	20.6 / 23.7
Keel to top antenna fwd/aft - lowered mast	12.7 / 16.95

Communication	
Email	w-aviles@wilsonfleet.no
Phone	47 90744523 Mobil
SatPhone	47 21569994 V-Sat