


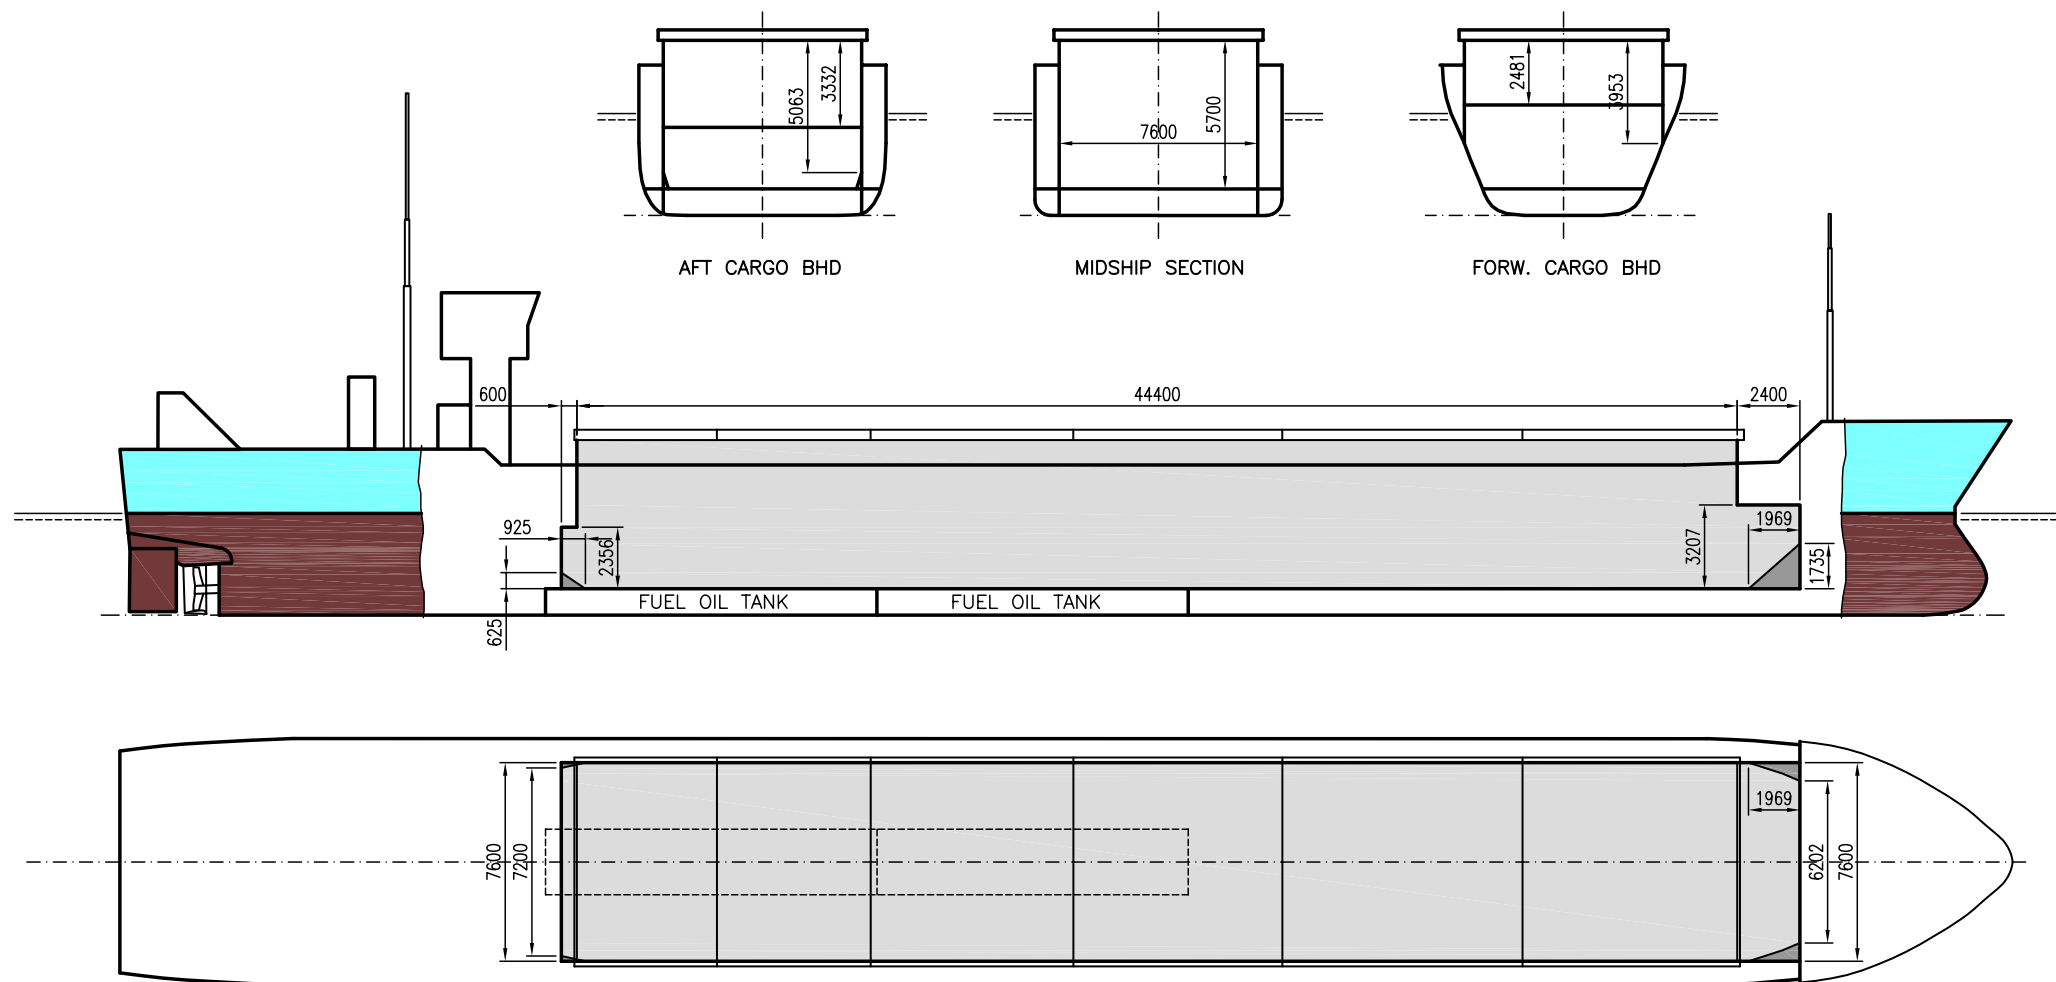

If not otherwise specified:
Dist/Dim in meters
Weights in m.tones

All details given in good faith without any guarantee

Builders	
Classification	DNV GL / 100 A5 E General cargo ship Equipped for carriage of containers DBC SOLAS-II-2,Reg.19 M MC E AUT
Length oa	72.5
Breadth mld	9.46
Depth mld	5.77
Draft summer	4.07
Deadweight summer draft	1536
Draft winter	3.97
Deadweight winter draft	1480
Gross tonnage	989
Net tonnage	528
Immersion(load draft) TPC	6.32
Mean draft of ship in heavy ballast	2.8
Distance from forward end of No. 1 hatch to aft end of last hatch	44.4
Hatch type	Kvaerner Multifold Crocodile
Container (TEU) capacity Hold / Deck	42 / 21

Hatch details:

a : Distance from waterline fully ballasted to top of hatch coamings
b : Distance from waterline fully loaded to top of hatch coamings
c : Distance from tank top to top of hatch coamings
d : Max permissible loading on hatch covers
e : Distance from ship's rail to inside hatch coamings
f : Height of hatch coamings
g : Hatch opening
h : No. of Loadingholes on hatchcovers X diameter in mm

Remarks:

7 bulkhead positions are possible, bulkheads can be shifted by hatch cover.
Figures given for ME tank capacity includes figures for AUX.

Htch#	a	b	c	d	e	f	g
1	3.9	2.63	5.7	1.44	0.93	0.95	44.4 x 7.6

	Bale		Grain		
Hold#	cbm	cbft	cbm	cbft	Hold dimensions
1	1848	65262	1848	65262	46.8 x 7.6 x 5.7

Compartments	a	b	c	d	e	f
	171	299	406	598	182	143

Ex.
IMO No
Call sign
Build
Flag

Fundo
9117117
8PUN
1995
BRB

Max permissible load on deck/hatch-cover, mt/sqm	1.44
Max permissible load on tanktop, mt/sqm	14
Max air draft - 1	18.7
Max air draft - 2	8.5
Water ballast capacity	755
MGO Capacity (Cbm)	76.1
IFO Capacity (Cbm)	0
Service speed, knots	10
A60	No
Bow thruster	128 kW, Yes
Boxed	No
Open hatch	No
Rhine fitted	Yes
Ammonium Nitrate fitted	Yes
FeSi fitted	Yes
Keel to top antenna fwd/aft	16.3 / 23.17
Keel to top antenna fwd/aft - lowered mast	11.5 / 10.97

Communication	
Email	w-ems@wilsonfleet.no
Phone	47 41661694 Mobile
SatPhone	47 21 930 630 V-Sat