


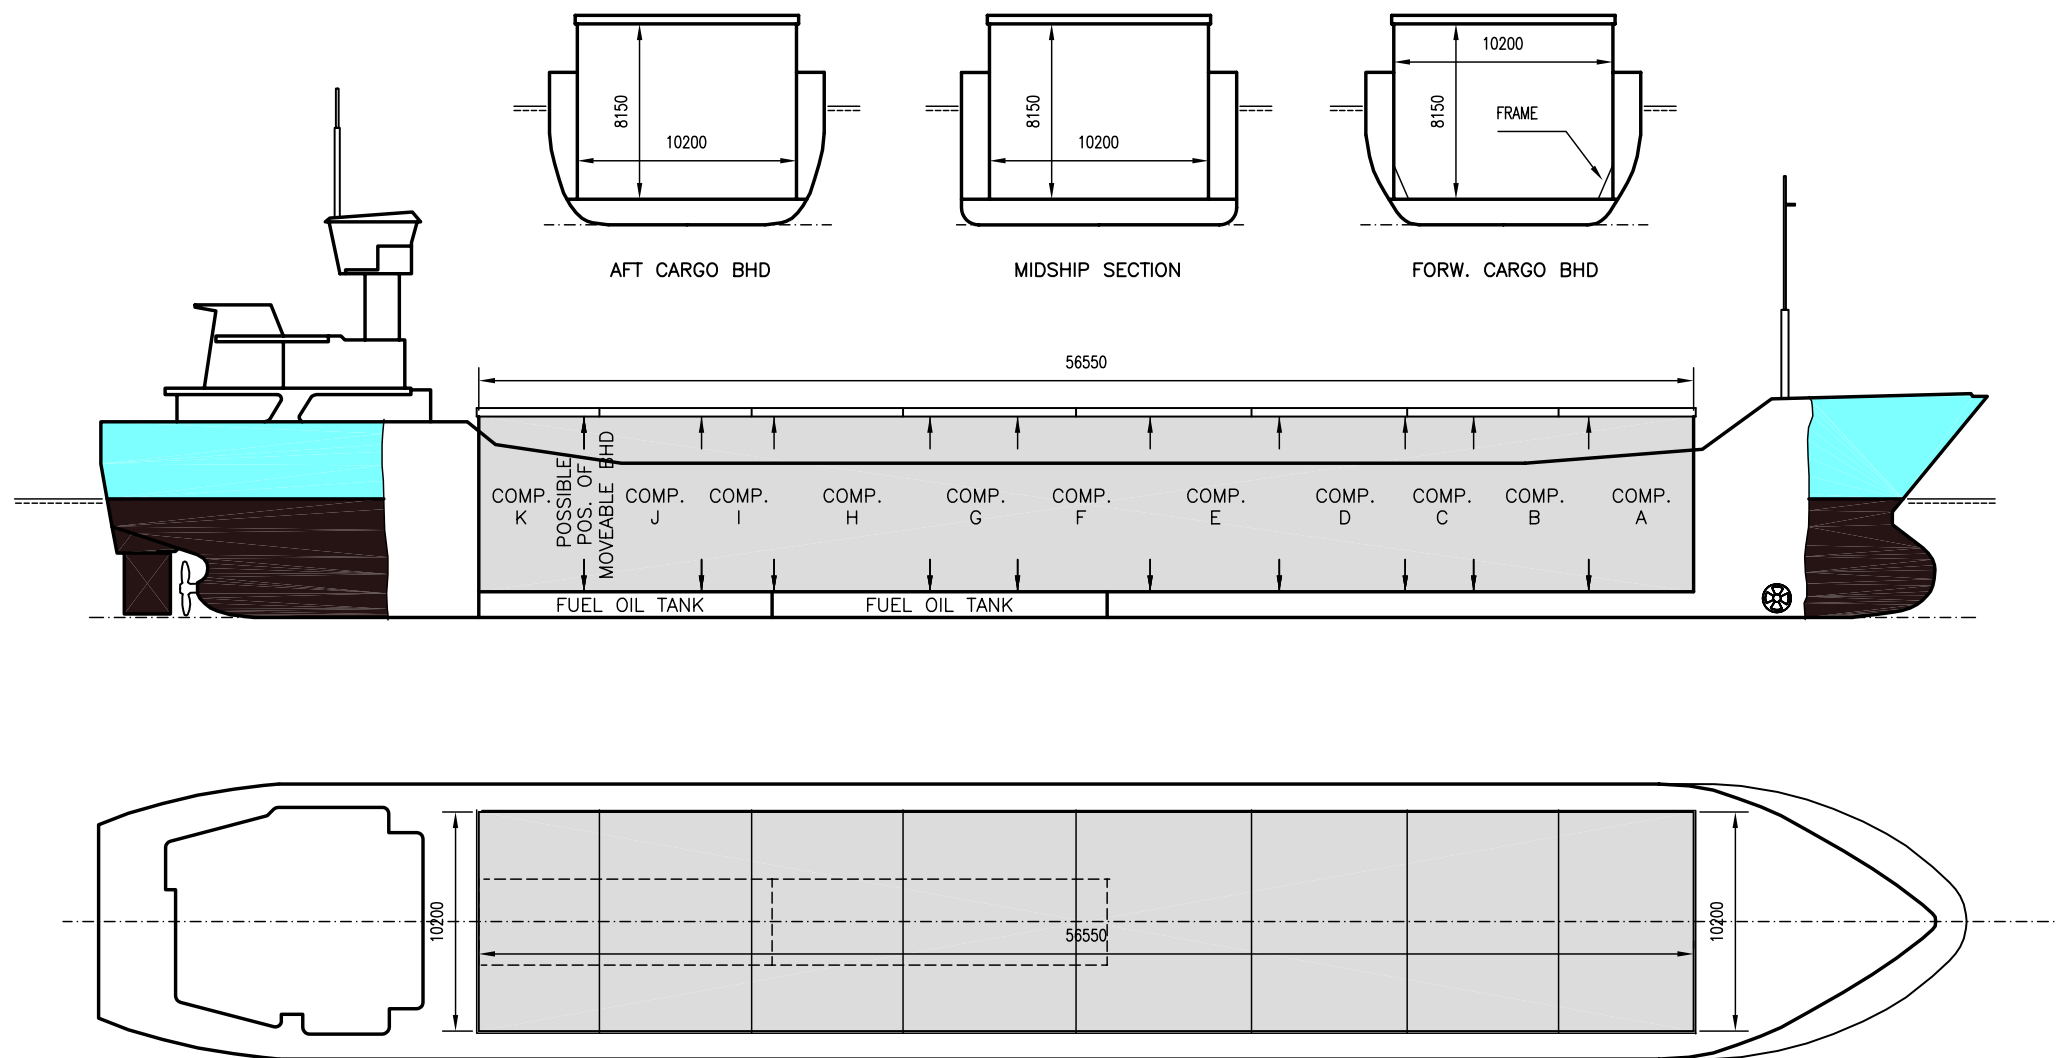

If not otherwise specified:
Dist/Dim in meters
Weights in m.tones

All details given in good faith without any guarantee

Builders	
Classification	DNV GL / 100 A5 E, General cargo ship with double hull Equipped for carriage of containers DBC SOLAS-II-2, Reg.19 G MC E AUT
Length oa	87.95
Breadth mld	12.8
Depth mld	7.1
Draft summer	5.691
Deadweight summer draft	3944
Draft winter	5.572
Deadweight winter draft	3823
Gross tonnage	2446
Net tonnage	1369
Immersion(load draft) TPC	9.7
Mean draft of ship in heavy ballast	3.54
Distance from forward end of No. 1 hatch to aft end of last hatch	56.55
Hatch type	Kvaerner Multifold Crocodile
Container (TEU) capacity Hold / Deck	108 / 68

Hatch details:

a : Distance from waterline fully ballasted to top of hatch coamings
b : Distance from waterline fully loaded to top of hatch coamings
c : Distance from tank top to top of hatch coamings
d : Max permissible loading on hatch covers
e : Distance from ship's rail to inside hatch coamings
f : Height of hatch coamings
g : Hatch opening
h : No. of Loadingholes on hatchcovers X diameter in mm

Htch#	a	b	c	d	e	f	g	h
1	5.8	3.85	8.15	1.56	1.3	2.1	56.55 x 10.2	16 x 600

Compartments	a	b	c	d	e	f	g	h	i	j	k
	430	444	254	465	489	519	329	625	270	429	394

Remarks:

2 moveable bulkheads, full hold height, 10 positions. Free length on tanktop 55.85M when bulkheads stored in aft position. 1 frame each side, 1.25M from forward end of hold, height 1.78M from tanktop and up, protruding abt 0.56M into hold at tanktop level.
Navigation bridge can be lowered and antennas/masts collapsed.
No containerfittings on board.
Vessel able to call NAABSA ports.
Note: 8 Hinges underneath Hatch cover, Height from tanktop to hinges: 7995.
A60

Cement holes: 16 cement holes

	Bale		Grain		
Hold#	cbm	cbft	cbm	cbft	Hold dimensions
1	4620	163154	4650	164213	56.55 x 10.2 x 8.15

Ex.
IMO No 9117208
Call sign LAYE8
Build 1994
Flag NIS

Max permissible load on deck/hatch-cover, mt/sqm	1.56
Max permissible load on tanktop, mt/sqm	15
Max air draft - 1	21.46
Max air draft - 2	8.06
Water ballast capacity	1603
MGO Capacity (Cbm)	211
IFO Capacity (Cbm)	0
Service speed, knots	10
A60	No
Bow thruster	185 kW, Yes
Boxed	Yes
Open hatch	Yes
Rhine fitted	No
Ammonium Nitrate fitted	Yes
FeSi fitted	Yes
Keel to top antenna fwd/aft	17.6 / 27
Keel to top antenna fwd/aft - lowered mast	11.7 / 13.3

Communication	
Email	w-lista@wilsonfleet.no
Phone	47 99321030 Mobile
SatPhone	47 21 403 304 V-Sat