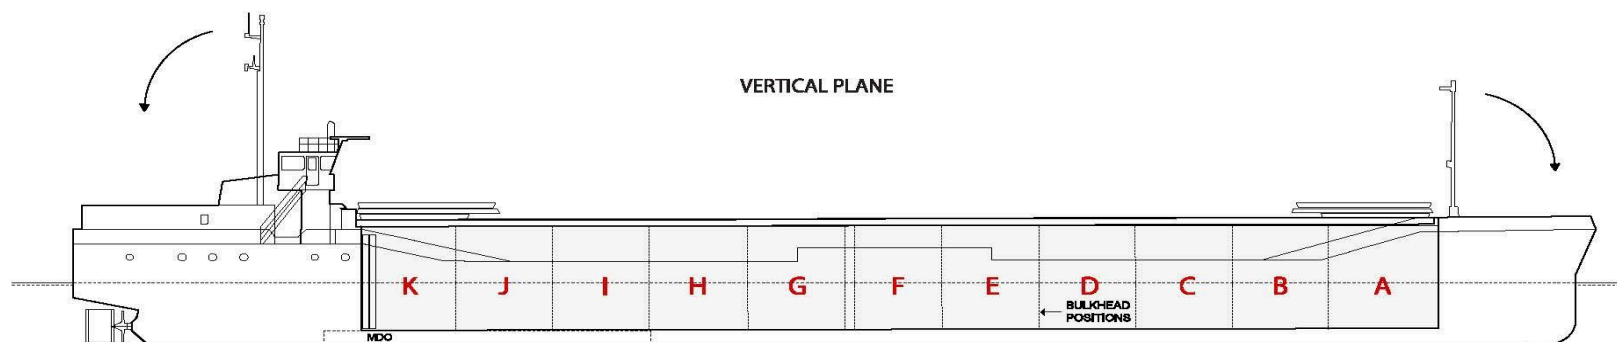


If not otherwise specified:
Dist/Dim in meters
Weights in m.tones

All details given in good faith without any guarantee

Builders	
Classification	DNV / 100 A5 E General cargo ship, equipped for carriage of containers DBC DG strengthened for heavy cargo; MC AUT
Length oa	88
Breadth mld	11.41
Depth mld	5.4
Draft summer	4.09
Deadweight summer draft	2624
Draft winter	4.02
Deadweight winter draft	2542
Gross tonnage	1898
Net tonnage	997
Immersion(load draft) TPC	9.64
Mean draft of ship in heavy ballast	3
Distance from forward end of No. 1 hatch to aft end of last hatch	46
Hatch type	Pontoon
Container (TEU) capacity Hold / Deck	60 / 24

Hatch details:

a : Distance from waterline fully ballasted to top of hatch coamings
b : Distance from waterline fully loaded to top of hatch coamings
c : Distance from tank top to top of hatch coamings
d : Max permissible loading on hatch covers
e : Distance from ship's rail to inside hatch coamings
f : Height of hatch coamings
g : Hatch opening
h : No. of Loadingholes on hatchcovers X diameter in mm

Remarks:

2 moveable bulkheads - 10 positions
Stanchions (8) for timber

Htch#	a	b	c	d	e	f	g
1	4.9	3.81	6.88	1.5	1.2	2.5	61.9 x 9.27

	Bale		Grain		
Hold#	cbm	cbft	cbm	cbft	Hold dimensions
1	3788	133772	3788	133772	61.9 x 9.27 x 6.88

Compartments	a	b	c	d	e	f	g	h	i	j	k
	344	344	344	344	344	344	344	344	344	344	344

Ex.
IMO No
Call sign
Build
Flag

RMS Twisteden
9195468
8PBH6
2002
BRB

Max permissible load on deck/hatch-cover, mt/sqm	1.5
Max permissible load on tanktop, mt/sqm	15
Max air draft - 1	20
Max air draft - 2	0
Water ballast capacity	1523
MGO Capacity (Cbm)	0
IFO Capacity (Cbm)	0
Service speed, knots	0
A60	No
Bow thruster	275 kW, Yes
Boxed	Yes
Open hatch	Yes
Rhine fitted	Yes
Ammonium Nitrate fitted	Yes
FeSi fitted	Yes
Keel to top antenna fwd/aft	17.3 / 23
Keel to top antenna fwd/aft - lowered mast	12.5 / 12.5

Communication	
Email	w-twisteden@wilsonfleet.no
Phone	47 90730182 Mobile
SatPhone	47 215 69 811 V-Sat