


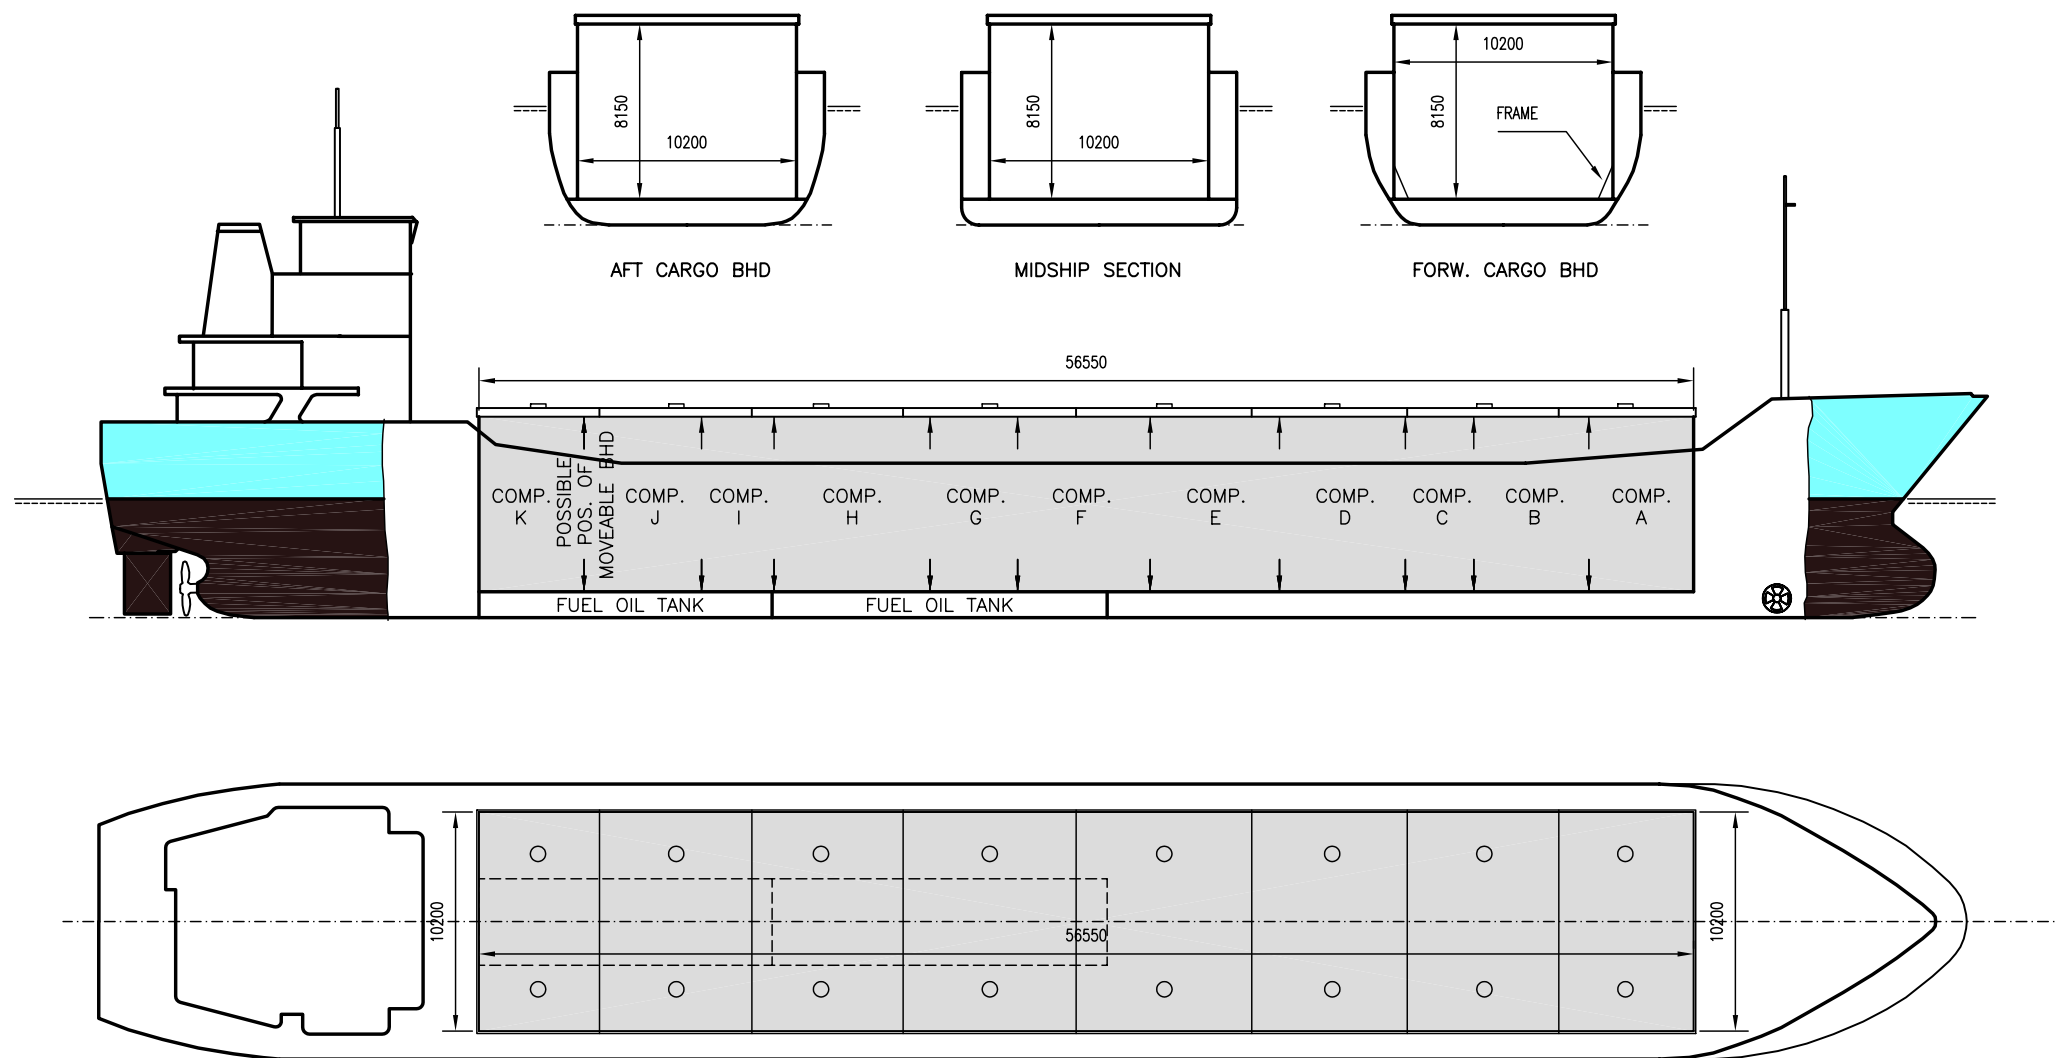

If not otherwise specified:
Dist/Dim in meters
Weights in m.tones

All details given in good faith without any guarantee

Builders	
Classification	DNV GL / 100 A5 E General cargo ship with double hull Equipped for carriage of containers DBC SOLAS-II-2,Reg.19 G Strenghtened for heavy cargo MC E AUT
Length oa	87.9
Breadth mld	12.8
Depth mld	7.1
Draft summer	5.52
Deadweight summer draft	3671
Draft winter	5.4
Deadweight winter draft	3554
Gross tonnage	2506
Net tonnage	1351
Immersion(load draft) TPC	10.1
Mean draft of ship in heavy ballast	3
Distance from forward end of No. 1 hatch to aft end of last hatch	56.55
Hatch type	Kvaerner Multifold Crocodile
Container (TEU) capacity Hold / Deck	108 / 60

Hatch details:

a : Distance from waterline fully ballasted to top of hatch coamings
b : Distance from waterline fully loaded to top of hatch coamings
c : Distance from tank top to top of hatch coamings
d : Max permissible loading on hatch covers
e : Distance from ship's rail to inside hatch coamings
f : Height of hatch coamings
g : Hatch opening
h : No. of Loadingholes on hatchcovers X diameter in mm

Remarks:

FESI fitted for packaged goods only.
Free height in hold under knucle point (hinges) 7.99 m.
2 moveable bulkheads, full hold height, 10 positions. Free length on tanktop 55.85 m when bulkheads stored in aft position.
1 frame each side, 1.25 m from forward end of hold, height 1.78 m from tanktop and up, protruding abt. 0.56 m into hold at tanktop level.
No containerfittings on board.
* If fwd hatch covers are open: distance from keel to top of hatch is 17.50 m.

Htch#	a	b	c	d	e	f	g	h
1	6.2	3.9	8.13	1.56	1.3	2.28	56.5 x 10.2	16 x 600

	Bale		Grain		
Hold#	cbm	cbft	cbm	cbft	Hold dimensions
1	4612	162871	4649	164178	56.5 x 10.2 x 8.13

Compartments	a	b	c	d	e	f	g	h	i	j	k
	430	444	254	465	489	519	329	626	270	329	394
	1200	1210	1220	5000	3000	4000	4560	1200	1235	1500	1600

Ex.
IMO No 9056040
Call sign LAXN8
Build 1993
Flag NIS

Max permissible load on deck/hatch-cover, mt/sqm	1.56
Max permissible load on tanktop, mt/sqm	15
Max air draft - 1	22
Max air draft - 2	0
Water ballast capacity	1629
MGO Capacity (Cbm)	193.9
IFO Capacity (Cbm)	0
Service speed, knots	10
A60	No
Bow thruster	185 kW, Yes
Boxed	Yes
Open hatch	Yes
Rhine fitted	No
Ammonium Nitrate fitted	Yes
FeSi fitted	No
Keel to top antenna fwd/aft	19.2 / 31.9
Keel to top antenna fwd/aft - lowered mast	11 / 22

Communication	
Email	w-grimsby@wilsonfleet.no
Phone	47 47678732 Mobile
SatPhone	47 21 403 814 V-Sat