


WILSON CADIZ

DEADWEIGHT GROUP
 4200 dwt



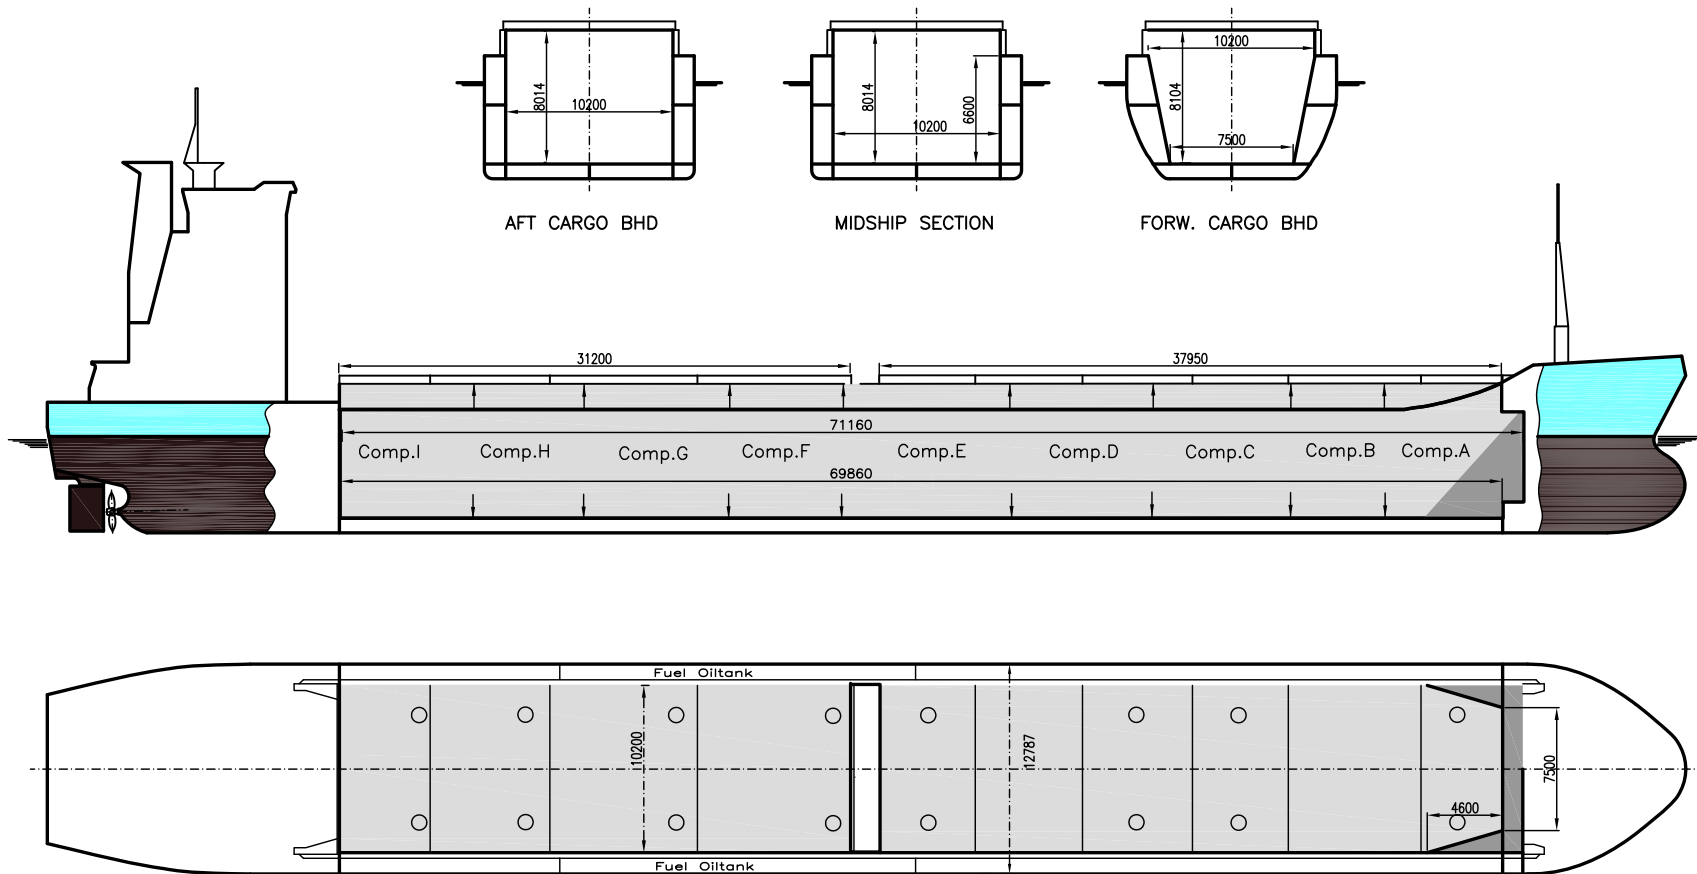

WILSON CADIZ

Ex. DUTCH SUN
 DWT GROUP 4200
 IMO NO 9192612
 CALL SIGN 8PSY
 BUILD 01/2000
 FLAG Barbados

If not otherwise specified :
 Dist/Dim in meters
 Weights in m.tons

All details given in good faith without guarantee

Builders	Slovenske Lodenice, Komarno
Classification	GL / 100 A5 E G Solas II-2. req.19 MC E AUT
Length oa	99.91
Breadth mld	12.80
Depth mld	7.55
Draft summer	5.68
Deadweight summer draft	4431
Draft winter	5.56
Deadweight winter draft	4288
Gross tonnage	2999
Net tonnage	1741
Immersion(load draft) TPC	11.89
Mean draft of ship in heavy ballast	3.45
Distance from forward end of No.1 Hatch to aft end of last hatch	70.85
Hatch type	Mac Gregor Folding type
Container (TEU) capacity Hold / Deck	129 / 168

Hatch details:

- a : Distance from waterline fully ballasted to top of hatch coamings
 b : Distance from waterline fully loaded to top of hatch coamings
 c : Distance from tank top to top of hatch coamings
 d : Max permissible loading on hatch covers
 e : Distance from ship's rail to inside hatch coamings
 f : Height of hatch coamings
 g : Hatch opening
 h : No. of Loadingholes on hatchcovers X diameter in mm

Remarks :

- Two movable bulkheads, 5 positions each hatch.
 Height under strongbeam 5.59m. Free height under hatch hinges 8.01m.
 Fixed platform and removable ladder under strongbeam, port side.
 Sloping sides fwd in hold, distance 5.33m from fwd end.
 Length of fully boxed hold (with movable bulkhead in fwd position) = 63.10m.
 Free length boxed hatch No.1 w/bulkhead in fwd position = 30.85m,
 free length hatch No.1 w/bulkhead in aft position = 37.10m.
 Free length hatch No.2 w/bulkhead in fwd or aft position = 30.50m
 Bunker cons. aux engine in port only.

Max permissible load on deck, mt/sqm	1.70	
Max permissible load on tanktop, mt/sqm	15.00	
Max air draft - 1	25.35	
Max air draft - 2	-	
Distance from keel to top antenna -1	28.80	
Distance from keel to top antenna -2	-	
Water ballast capacity	1 704.60	
Fuel main engine - capa.(cbm)	172.00	
Fuel aux engine - capa.(cbm)	32.50	
Speed service, knots	12.50	
Cargo gear	Gearless	No
Bow thruster	.250 Kw.	Yes
Boxed		Yes
Double skin		Yes
Open hatch		Yes
Rhine fitted		No
Ammonium Nitrate fitted		Yes
FeSi fitted		Yes

Hatch#	Bale							Grain				Hold dimensions	Compartment :		Communication :		Equipment		
	a	b	c	d	e	f	g	h	Hold#	cbm	cbft		cbm	cbft	#	cbm		Type	No
1	5.72	3.49	8.17	1.70	1.30	1.60	37.95 x 10.20	8 x 600mm	1	5549	195 957	5841	206 272	69.86 x 10.20 x 8.01	A	551	Telex 1	431421610	Inmarsat
2	5.72	3.49	8.17	1.70	1.30	1.60	31.20 x 10.20	8 x 600mm							B	498	Telex 2	431421611	Inmarsat
															C	700	Tlph 1	+47 417 94184	Gsm
															D	698	Tlph 2	+47 417 94183	Gsm
															E	828	Fax	+47 976 32187	Gsm
															F	583	Email	w-cadiz@gtw.dualog.com	
															G	656			
															H	644			
															I	683			