


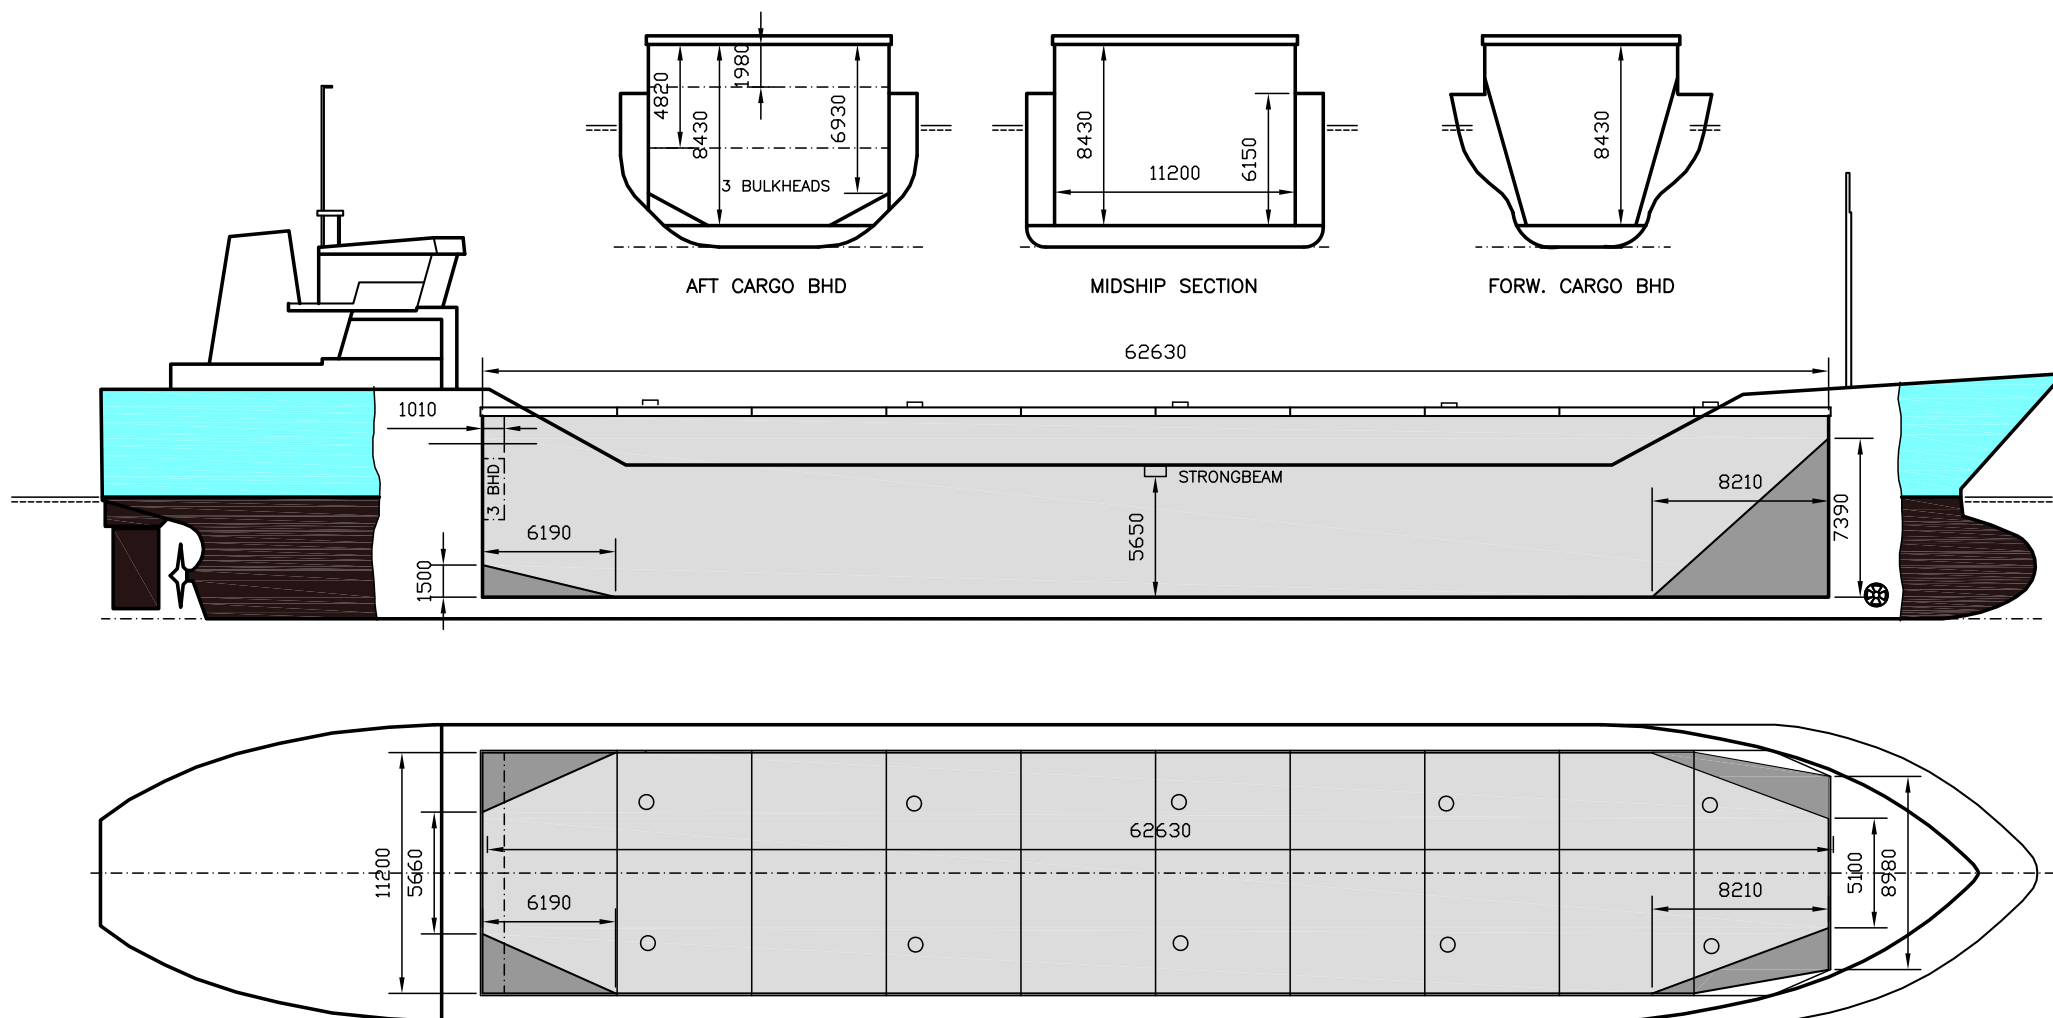

If not otherwise specified:
Dist/Dim in meters
Weights in m.tones

All details given in good faith without any guarantee

Builders	
Classification	DNV GL / 100 A5 E1 General cargo ship DBC SOLAS-II-2,Reg.19 G Strenghtened for heavy cargo MC E1 AUT
Length oa	91.2
Breadth mld	13.8
Depth mld	7.15
Draft summer	5.76
Deadweight summer draft	4228
Draft winter	5.64
Deadweight winter draft	4095
Gross tonnage	2901
Net tonnage	1693
Immersion(load draft) TPC	11.12
Mean draft of ship in heavy ballast	3.54
Distance from forward end of No. 1 hatch to aft end of last hatch	62.63
Hatch type	Pontoon
Container (TEU) capacity Hold / Deck	0 / 120

Hatch details:
a : Distance from waterline fully ballasted to top of hatch coamings
b : Distance from waterline fully loaded to top of hatch coamings
c : Distance from tank top to top of hatch coamings
d : Max permissible loading on hatch covers
e : Distance from ship's rail to inside hatch coamings
f : Height of hatch coamings
g : Hatch opening
h : No. of Loadingholes on hatchcovers X diameter in mm

Htch#	a	b	c	d	e	f	g	h
1	5.81	3.59	8.4	1.6	1	2.2	62.63 x 11.2	10 x 320

Compartments	a	b	c
	2755	2358	507

Remarks:
Strengthened for heavy cargo.
One movable bulkhead in three parts, each part 2.80m high, total height 8.40m, two different positions. If full height used, actual cubic capacity each compartment will be combination of compartments a-b-c-d (f.inst. a + total of b-c-d).
When not in use, movable bulkhead stowed in aft/upper part of hold, reducing total length of upper part of hold to 61.62m.
One strongbeam in hold, fitted between frames 70 and 71, 6.20m above tanktop.

	Bale		Grain		
Hold#	cbm	cbft	cbm	cbft	Hold dimensions
1	5620	198468	5620	198468	62.6 x 11.2 x 8.4

Ex. Garmo
IMO No 9116022
Call sign 8PBB8
Build 1994
Flag BRB

Max permissible load on deck/hatch-cover, mt/sqm	0
Max permissible load on tanktop, mt/sqm	12
Max air draft - 1	32
Max air draft - 2	0
Water ballast capacity	1594
MGO Capacity (Cbm)	70
IFO Capacity (Cbm)	234
Service speed, knots	12
A60	No
Bow thruster	200 kW, Yes
Boxed	No
Open hatch	Yes
Rhine fitted	No
Ammonium Nitrate fitted	Yes
FeSi fitted	Yes
Keel to top antenna fwd/aft	22.6 / 35
Keel to top antenna fwd/aft - lowered mast	0 / 0

Communication	
Email	w-heron@wilsonfleet.no
Phone	47 97759364 Mobile
SatPhone	47 21 966 137 V-Sat